

Professional TFT LCD VGA Monitor for CCTV

DTLM-22



DTLM-22C

Features

- * 22 Inch S-PVA Panel
- * 1680X1050 Pixels
- * Contrast Ratio(typ) 1000:1(Typical)
- * Luminance of White: 300cd/m2
- * NTSC/PAL(Auto Selection)
- * Video Input: BNC x 1
- * Video Output: BNC x 1
- * Audio Input: RCA x 2
- * Audio Output: 1W x 2 (Speaker)
- * More than 500TV Lines
- * 15 Pin D-sub, SVHS
- * Plug & Play: VESA DDC 2B
- * Language Support:English
- * Dimension(W X H X D): 503mm X 326mm X 56mm

***DTLM-22C model's specification is same with DTLM22 except of Chasis and stand bracket.

Bracket(Optional)

DTLM-22




-ANGLE VIEW-

-FRONT VIEW-

-BACK VIEW-



BOTTOM VIEW

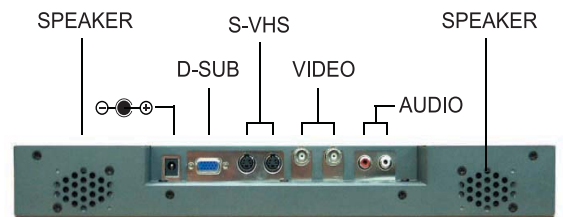

NO	AREA	ITEM	DTLM-22		
1	LCD	Type	22" Panel		
		Driver Element	22" S-PVA Panel		
		Pixel Pitch	0.270mm		
		Pixel Arrangement	1680(H) X 1050(V), RGB Vertical Stripe		
		Display Colors	16.7M Colors		
		Number of Pixels	1680 X 1050		
		Contrast Ratio(Typ)	1000 : 1(Typical)		
		Luninance of White(Typ / Min)	300 cd/m2		
		Viewing Angles(CR≥10)	Left / Right	89° / 89°	
			Top / Bottom	89° / 89°	
		Light Source / Lifetime	6CCFL /40,000 Hours(Minimum)		
		Response Time(Tr/Td)	5ms		
		2	Video	Frequency	80MHz
Frequency	Horizontal			30 ~ 60KHz	
	Vertical			55 ~ 75KHz	
Video Mode	NTSC/PAL(Auto Selection)				
Scanning Method	Digital progressive scan(Still/Progressive)				
Video Input Signal	Composite			1.0Vp-p, 75Ω	
	S-VIEO			0.7Vp-p(Luminance), 0.3Vp-p(Chrominance), 75Ω	
Viedo Input Connector	Composite			BNC X 2	
	S-VIEO			4Pin Mini Din x 2	
Termination	75Ω ,Auto Termination				
Audio Input Connector	RCA X 2 (Stereo)				
Audio Output	0.5W X 2				
Resolution	More than 500 Lines				
Display Area	432 mm(H) X 324 mm(V)				
Input Signal	Analog RGB, CVBS, SVHS				
Input Connector	15 Pin D-sub, RAC, SVHS				
3	PC	Input Resolution	Maximum Resolution	1680 X 1050 @ 75Hz	
			Recommeded Resolution	1680 X 1050@ 60Hz	
4	Control	Plug & Play	VESA DDC 2B		
		User Controls	Brightness, Contrast, Tint, Color, Sharpness, etc		
5	Power	OSD Language	English		
		DC Power	12VDC +-5%		
		Power Consumption	60W(Without Audio)		
6	MECH.	Power Supply	Power Supply	External AC Adaptor (+12Vdc)	
			Dimensions (W x H x D)	Net Packing	503mm X 326mm X 56mm
				Case Color	
7	TEMP.	Case Material	MOLD		
		Weight (Net/Packing)	kg / kg		
		Operating Temperature	0 ~ 40°C		
8	Accessories	Storage Temperature	0 ~ 50°C		
			AC Adaptor, Power Cord, Manual, Diskette		